






Denvar make Weather Proof Industrial Pressure Gauges



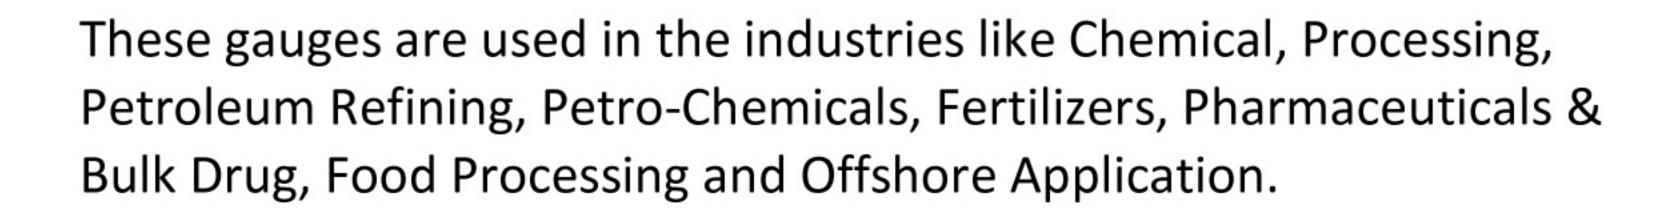

Dial Size	65mm, 100mm, 150mm and 250mm.
Accuracy	±1% F.S.D. (±0.5 optional) ±2% for 65mm dial
Range	From -760MMHg (Vacuum)to up to +600 kg/cm²(All Std. Ranges)
Over range protection	30% or as per class I / II of IS 3624
Dial	Aluminium Black Graduation on White Background.
Casing	Die cast aluminium screwed case with inner Bezel of A.B.S. plastic or aluminium, Weatherproof as per IP55 or IP65
Mounting	Direct mounting Bottom or Back entry, Back entry bracket mounting.
Connections	3/8", 1/2" B.S.P. or N.P.T. , M 20 X 1.5 (M) and other
Fitments	Zero adjustment pointer and Blowout safety disc.
Bourdon & Socket	Stainless Steel 316L / Brass.
Movements	Stainless Steel 304/Leaded Brass.
Joints	For Stainless Steel - Argon arc welded, for nonferrous hard soldered. Heat treated stress relieved
Temperature Limits	Max 270°C for Stainless Steel and 125°C for Nonferrous.
Optional Fitments	Toughened or Acrylic glass, Electrical Magnetic single or double snap action Contacts, Glycerine filling, Max. reading pointer, diaphragm units, Gauge Saver, Syphon, Gauge Cock, Dampers etc.